

# Pneumatic Products™

## Mist Eliminators PME Series

The auditor's choice to reduce energy costs and remove oil and water aerosols from compressed air systems.

- Protect products and processes from contamination
- Increase the life of pneumatic equipment
- Help eliminate paint appearance and adhesion problems
- Keep pneumatic instruments operating

### Low Operating Costs

- Low pressure drop: 0.5 to 1 psi (0.04 to 0.07 kgf/cm<sup>2</sup>)
  - Typical coalescing filters operate at 3 to 6 psi (0.21 to 0.42 kgf/cm<sup>2</sup>) requiring the air compressor to operate at higher operating pressures, increasing power requirements by 2.5% or more
- Long element life: 8 to 15 years With a large in-depth bed, element life is much longer than conventional oil removal filters
- Virtually maintenance free

### Extra Protection

- Captures and retains large slugs of oil and water, should drain trap fail
- Protects downstream equipment from contamination should oil separator or rotary screw compressor fail

### Standard Features

- 5 year equipment warranty
- 5 year element life guarantee
- Differential pressure gauge mounted and piped
- Heavy duty ASME stamped pressure vessel
- Long life mist eliminator element
- Floor stand
- Dedicated vent port for demand type drains

### Superior Installation Flexibility

- Inlet piping clears vessel diameter to prevent element removal complications
- Flanged inlet connection ensures easy access to element
- Dedicated vent connection port for clean, easy demand drain trap installations

### Removes Submicronic Particles For Ultra Clean Air

- 100% of particles 3 microns and larger
- 99.98% of particles 0.1 micron and larger
- 0.5 ppm w/w maximum liquid content after filtration
- 1000 ppm maximum inlet liquid loading

### Optional Features

- Automatic condensate drains:
  - No-Loss drains (NLD-24-T Shown)
  - Timer drains
- Differential pressure gauge with reed switch



## Advanced Filter Bed Technology

Compressed air enters the flanged inlet assembly engineered for easy element access. Designed for optimum velocity, the air is directed through water resistant glass fibers. Water droplets, oil aerosols and solid particles entrained in the air stream are captured by the fibers through the mechanics of direct interception, inertial impaction, and diffusion that result from the forces of Brownian motion. The captured liquids and aerosols move along the fibers and coalesce into larger droplets. Gravity draws the coalesced liquids to the bottom of the filter element where they drop into a quiet zone in the bottom of the vessel for removal.


## Superior Drainage

Condensate drainage can be accomplished automatically by installing an optional drain valve. Timer operated drains or energy efficient demand style drain valves (optional) can be adapted to the drain connection. Demand style drain valves benefit from the demand drain vent connection port (see illustration) engineered into these vessels. This exclusive feature equalizes drain-to-vent pressures and simplifies vent piping installations. Equalized pressure ensures consistent drainage and prevents "air-lock" induced drain valve failures common in other designs.

## Sizing

Min. Inlet Pressure	psig	20	30	40	60	80	100	120	150
	kgf/cm <sup>2</sup>	1.4	2.1	2.8	4.2	5.6	7.0	8.4	10.5
	Multiplier	0.30	0.39	0.48	0.65	0.82	1.00	1.17	1.43

Maximum air flow at 100 psig (7 kgf/cm<sup>2</sup>) is indicated in the Specifications table. To determine maximum air flow at pressures other than 100 psig (7 kgf/cm<sup>2</sup>) multiply flow @ 100 psig (7 kgf/cm<sup>2</sup>) by multiplier from the sizing table that corresponds to the minimum operating pressure at the inlet of the filter.

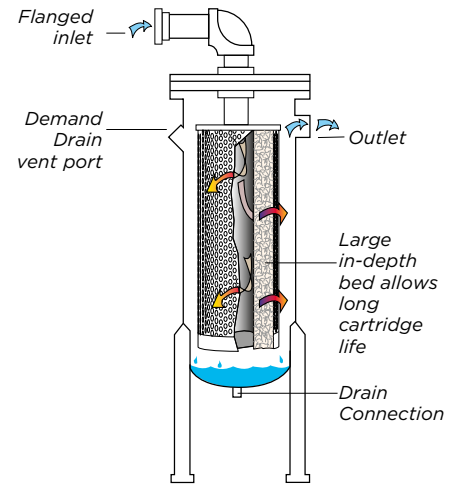

## Product Specifications

Model	Flow @ 100 psig (7 kgf/cm <sup>2</sup> )		Replacement Cartridge	Dimensions				Connections <sup>1</sup>		Weight	
	scfm	m <sup>3</sup> /h		Height in.	Height (mm)	Width in.	Width (mm)	Inlet	Outlet	lbs	(kg)
PME-125-PDI	125	212.4	M125-1	42 1/4"	1073.2	21"	533.4	2" NPT	2" NPT	455	208.4
PME-250-PDI	250	424.8	M250-1	42 1/4"	1073.2	21"	533.4	2" NPT	2" NPT	455	208.4
PME-500-PDI	500	849.5	M500-1	68 1/4"	1733.6	21"	533.4	3" NPT	3" NPT	520	235.9
PME-800-PDI	800	1359.2	M800-1	68 1/4"	1733.6	21"	533.4	3" NPT	3" NPT	530	240.4
PME-1100-PDI	1100	1868.9	M1100-1	72 5/16"	1836.7	23 1/2"	596.9	3" NPT	3" NPT	660	299.4
PME-1500-PDI	1500	2548.3	M1500-1	72 7/16"	1836.7	25"	635	4" R.F. FLG	4" R.F. FLG	775	351.5
PME-2100-PDI	1900	3228.1	M1900-1	75 3/4"	1924.1	32"	812.8	4" R.F. FLG	4" R.F. FLG	1225	555.7
PME-2400-PDI	2400	4077.6	M2400-1	75 3/4"	1924.1	32"	812.8	4" R.F. FLG	4" R.F. FLG	1245	564.7
PME-3000-PDI	3000	5097.1	M3000-1	88 3/4"	2254.3	32"	812.8	4" R.F. FLG	4" R.F. FLG	1385	628.2
PME-4500-PDI	4500	7645.6	M4500-1	153"	3886.2	32"	812.8	6" R.F. FLG	6" R.F. FLG	1770	802.9
PME-6000-PDI	6000	10194.1	M6000-1	CF	CF	CF	CF	CF	CF	CF	CF
PME-8000-PDI	8000	13592.1	M8000-1	CF	CF	CF	CF	CF	CF	CF	CF

Maximum working pressure: 150 psig (10.5 kgf/cm<sup>2</sup>), Maximum operating temperature: 150°F (66°C)

<sup>1</sup> Consult factory for BSP or DN flanges

## Mist Eliminators PME Series

Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region.

# Pneumatic Products<sup>TM</sup>

**Pneumatic Products Headquarters**  
4647 SW 40th Avenue  
Ocala, Florida 34474-5788 U.S.A.  
**Tel.:** (724) 745-1555  
**Fax:** (724) 745-6040

[pneumaticproducts.com](http://pneumaticproducts.com)